
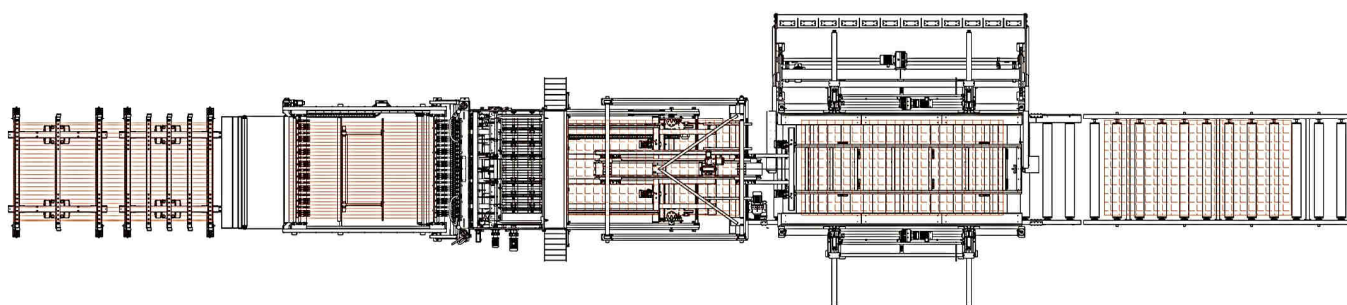



C-02A&D-02 REINFORCEMENT MESH PRODUCTION LINE

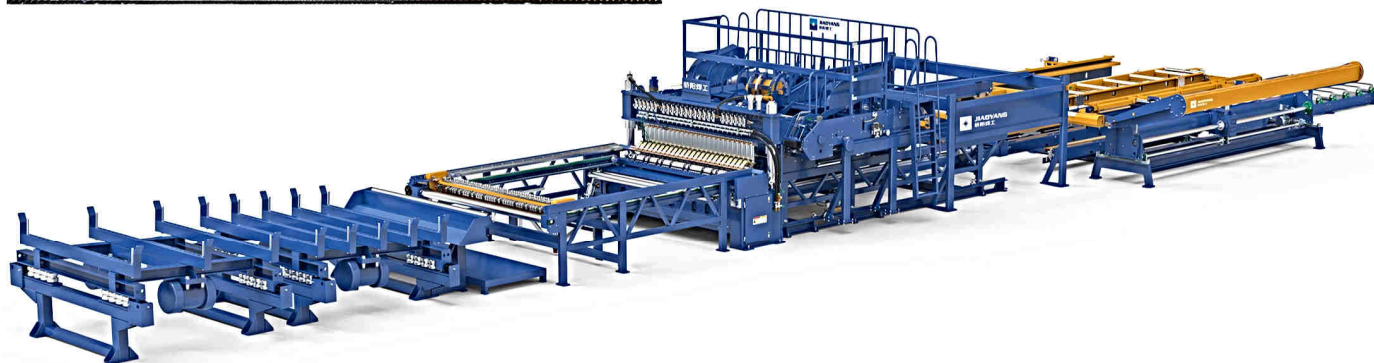

Parameters: GWC2500C-02A&GWC2500/3300D-02

Mesh width	2500mm	Cross wire space	$\geq 50\text{mm}$	Line wire space	Multiple of 50
	2500mm		$\geq 100\text{mm}$		$\geq 100\text{mm}$ (Multiple of 50)
	3300mm		$\geq 100\text{mm}$		$\geq 100\text{mm}$ (Multiple of 50)
Number of electrodes	24sets	Transformer	125KVA $\times$ 6	Wire diameter	ϕ 3-8mm
	24sets		160KVA $\times$ 12		ϕ 5-12mm
	32sets		160KVA $\times$ 16		ϕ 5-12mm
Welding material	Cold rolling ribbed wire /smooth wire	Welding speed	60-80 times/min	Finished mesh	panel mesh 6m
			60-80 times/min		panel mesh 12m
			60-80 times/min		panel mesh 12m

Standard Configuration

line wire holding platform、line wire feeding trolley、pneumatic main welding machine、cross wire preloading magazine、servo motor pull mesh、turner、auto.mesh falling device(12m).