
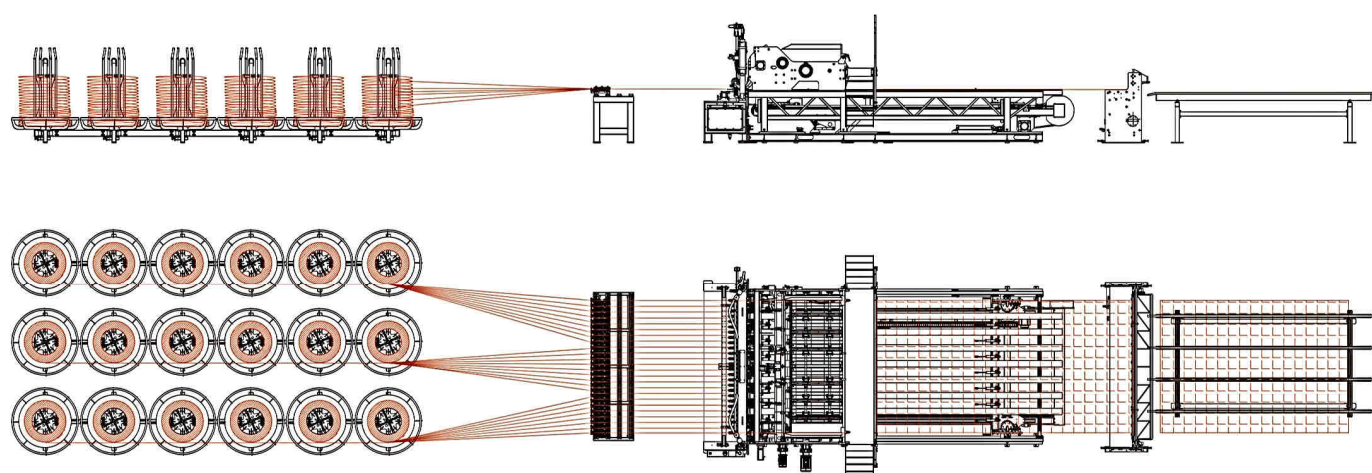


C-02 ECONOMIC REINFORCEMENT MESH PRODUCTION LINE

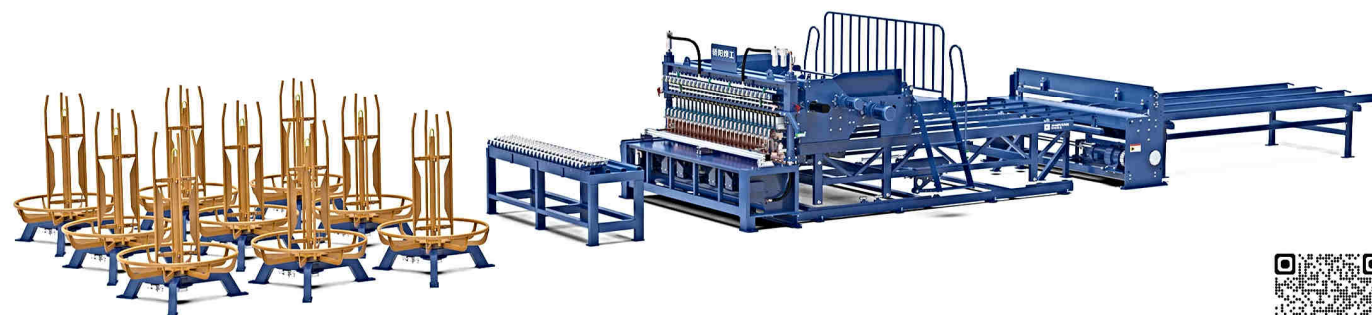

Parameters: GWC1200/1600/2500C-02

Mesh width	1200mm	Cross wire space	$\geq 50\text{mm}$	Line wire space	Multiple of 50
	2100mm				
	2500mm				
Number of electrodes	12sets	Transformer	125KVA $\times$ 3	Wire diameter	ϕ 3-8mm
	16sets		125KVA $\times$ 4		
	24sets		125KVA $\times$ 6		
Welding material	Cold rolling ribbed wire /smooth wire	Welding speed	50-70 times/min	Finished mesh	panel mesh 6m

Standard Configuration

1T wire payoff、single row straightening device、pneumatic welding、cross wire hopper、pulling(2500mm with double servo)、cutting、mesh receiving table.

A/B

C/D

ZB

ZY

CH/BH

ZW

GTQ

Other